



CMOS high definition (HD) image sensor

Description

The viimagic 9225/26 is a high performance, low power, 2/3" HD resolution (1920 x 1080 pixel) CMOS image sensor capable of capturing still or motion images suitable for many applications in the industrial area.

This CMOS sensor can be used in various scanning modes employing global or rolling shutter with electronic exposure control up to a maximum HDTV frame rate of 240 Hz.

Due to the integrated ADCs, programmable sensor control and timing functions it offers a high degree of flexibility for the end product with a minimum of external components beyond the standard video rates and formats. Main applications are high performance video cameras and high resolution measurement devices. In the high dynamic range mode, the dynamic range of the sensor can be extended beyond 120 dB by multi sampling or selecting the non-linear response curve.

Features

- CMOS image sensor of HD resolution (1920 x 1080 pixel) (2048 x 1080 pixel)
- Quadruple on-chip 12-bit A/D converters
- High dynamic range (HDR) capability
- Equivalent pixel clock: 600 MHz (maximal)
- Region of interest: horizontal sub-sampling by 32 column blocks and line wise vertical sub-sampling by token input of vertical scanning control
- Variable pixel clock rate, flexible scanning schemes (interlace, progressive) by token input of vertical scanning control
- Square pixel 5 μm
- μ-lens for improved sensitivity
- Programmable gain
- External line start input with programmable line start delay setting for synchronization
- Programmable rolling shutter or global shutter
- Selectable readout modes
 - High speed analog double sampling
 - Best performing correlated digital double sampling (DDS)
- On-chip temperature sensor to allow temperature compensation
- Supply voltages: 3.3V (typ.) for core interfaces, 1.8V (typ.) for digital logic
- μPGA-185 ceramic package (25 mm x 23 mm)

Applications

- Targeted for high performance applications
- High-end surveillance
- Industrial vision
- Medical imaging
- Automotive

Options

- 9225 Monochrome
- 9226 Color, RGB Bayer

viimagic 9225 / 26

Advanced product Information – Rev. 0.3 May 2011

viimagic
capture the world in HD


Parameter	Typical Values
Array format	Total: 2112 H x 1124 V Active: 2068 H x 1100 V
Effective image area	Total: 10.56 mm x 5.62 mm Active: 10.34 mm x 5.50 mm
Optical format	2/3" (1920 x 1080 pixel)
Pixel size	5 μ m x 5 μ m
Video outputs	up to 4 x 4 LVDS
Frame rate (at full resolution)	24, 25, 30, ... 120 fps DDS 24, 25, 30, ... 240 fps CDS
Dynamic range	Linear Mode: > 60 dB High dynamic mode: > 120 dB
Electronic shutter	Global/Rolling shutter
Sensitivity	6 V/lux sec (@ 560 nm)
Video SNR	57 dB (Green 3 Lux, BW=0.4 ... 30 MHz)
Quantum efficiency	55 %
Random noise	< 6e (in dark area)
Full well capacity	16ke
FPN	6e (with digital double sampling)
PRNU	< 1.0 %
Supply voltage ¹	3.3V, 1.8V (1.9V)
Power consumption ¹	1.1 W (@ 60 fps/DDS, 2.5V)
Operating temperature	-20° C ... +75° C
Package	μ PGA-185 ceramic package (25 mm x 23 mm)

Key performance data partly depends on operation modes.

¹For power optimization it is possible to operate LVDS transmitters at 2.5V.
For system clock operation above 85MHz use 1.9V for ADC supply voltage.

Disclaimer:

viimagic reserves the right to modify the specification of its products without notice. Photos, drawings and application circuits, if any, are non-binding. This document provides information only on viimagic products. While it is believed to be accurate, viimagic is not responsible for any errors or consequential damages. viimagic reserves the right to modify it without prior notice. Any communication or reproduction in all or in part must have the prior approval of the author. viimagic disclaims any express or implied warranty, relating to sale and/or use of viimagic products including liability or warranties relating to fitness for a particular purpose, merchantability or infringement of any patent, copyright or other intellectual property right. No license, expressed or implied, by estoppel or otherwise, to any intellectual property is granted by this document. Unless stated otherwise in viimagic's Terms and Conditions of Sale for such products, viimagic assumes no liability whatsoever. This product is not intended for use in medical, life saving or life sustaining application.

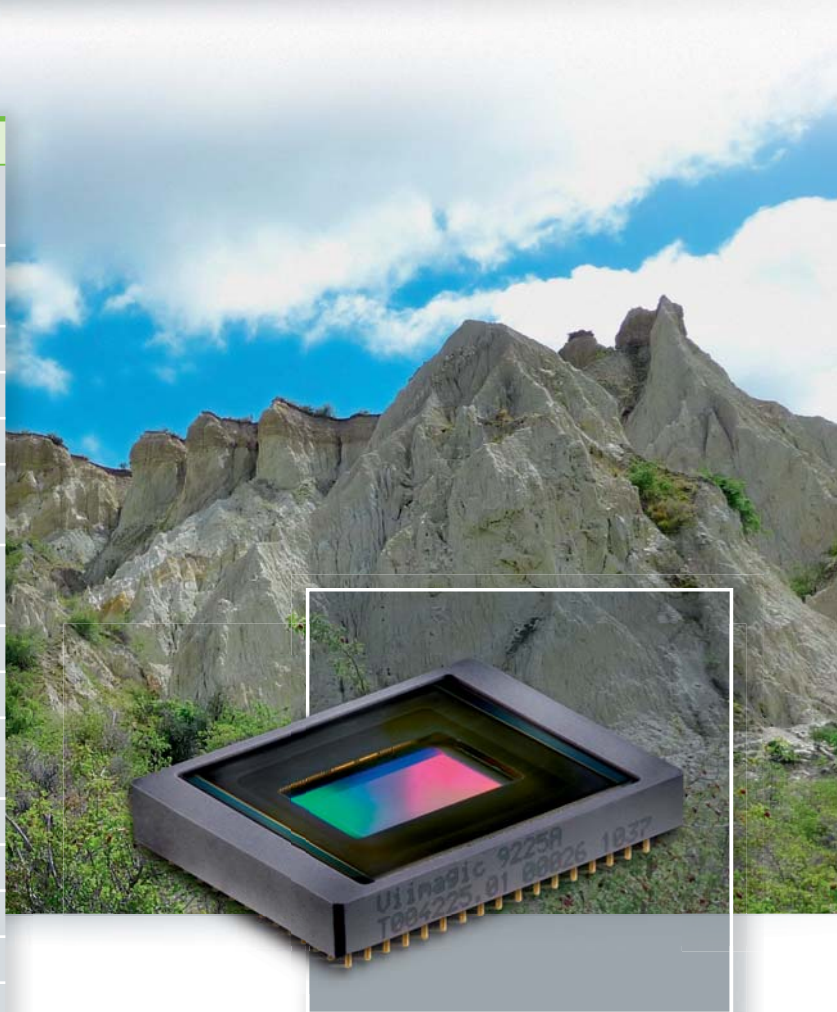

Contact information:

Please forward any questions you may have to:
info@viimagic.com

viimagic GmbH

Hermann-Schwer-Str. 3
78048 Villingen-Schwenningen, Germany
phone +49 (0)7721 944 788-0
fax +49 (0)7721 944 788-99
web www.viimagic.com